

## PATENT COOPERATION TREATY

From the INTERNATIONAL BUREAU

PCT

NOTICE INFORMING THE APPLICANT OF THE  
COMMUNICATION OF THE INTERNATIONAL  
APPLICATION TO THE DESIGNATED OFFICES

(PCT Rule 47.1(c), first sentence)

To:

GIAVARINI, Francesco  
ABB Ricerca S.p.A.  
Viale Edison, 50  
I-20099 Sesto San Giovanni  
ITALIE

<b>Date of mailing (day/month/year)</b> 05 October 2000 (05.10.00)		
<b>Applicant's or agent's file reference</b> I 0094-PCT		<b>IMPORTANT NOTICE</b>
<b>International application No.</b> PCT/EP00/02210	<b>International filing date (day/month/year)</b> 09 March 2000 (09.03.00)	<b>Priority date (day/month/year)</b> 29 March 1999 (29.03.99)
<b>Applicant</b> ABB T & D TECHNOLOGIES LTD. et al		

1. Notice is hereby given that the International Bureau has communicated, as provided in Article 20, the international application to the following designated Offices on the date indicated above as the date of mailing of this Notice:

KR,US

In accordance with Rule 47.1(c), third sentence, those Offices will accept the present Notice as conclusive evidence that the communication of the international application has duly taken place on the date of mailing indicated above and no copy of the international application is required to be furnished by the applicant to the designated Office(s).

2. The following designated Offices have waived the requirement for such a communication at this time:

BR,CA,CN,IN,JP,RU,UA,ZA

The communication will be made to those Offices only upon their request. Furthermore, those Offices do not require the applicant to furnish a copy of the international application (Rule 49.1(a-bis)).

3. Enclosed with this Notice is a copy of the international application as published by the International Bureau on 05 October 2000 (05.10.00) under No. WO 00/58978

**REMINDER REGARDING CHAPTER II (Article 31(2)(a) and Rule 54.2)**

If the applicant wishes to postpone entry into the national phase until 30 months (or later in some Offices) from the priority date, a **demand for international preliminary examination** must be filed with the competent International Preliminary Examining Authority before the expiration of 19 months from the priority date.

It is the applicant's sole responsibility to monitor the 19-month time limit.

Note that only an applicant who is a national or resident of a PCT Contracting State which is bound by Chapter II has the right to file a demand for international preliminary examination.

**REMINDER REGARDING ENTRY INTO THE NATIONAL PHASE (Article 22 or 39(1))**

If the applicant wishes to proceed with the international application in the **national phase**, he must, within 20 months or 30 months, or later in some Offices, perform the acts referred to therein before each designated or elected Office.

For further important information on the time limits and acts to be performed for entering the national phase, see the Annex to Form PCT/IB/301 (Notification of Receipt of Record Copy) and Volume II of the PCT Applicant's Guide.

<b>The International Bureau of WIPO</b> 34, chemin des Colombettes 1211 Geneva 20, Switzerland  Facsimile No. (41-22) 740.14.35	<b>Authorized officer</b>  J. Zahra  Telephone No. (41-22) 338.83.38
---	--

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP 00/02210

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01F27/33

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 726 617 A (SMITH STEPHEN LINWOOD ET AL) 10 March 1998 (1998-03-10) claims 1-10	1,10,11
Y	US 5 333 455 A (YOSHIOKA SHIGEKI) 2 August 1994 (1994-08-02) column 3, line 25 -column 5, line 20	1,10,11
A	PATENT ABSTRACTS OF JAPAN vol. 004, no. 092 (M-018), 3 July 1980 (1980-07-03) & JP 55 049273 A (CANON INC), 9 April 1980 (1980-04-09) abstract	
A	WO 81 01479 A (SOUND ATTENUATORS LTD ;CHAPLIN G (GB); BEARCROFT R (GB); SMITH R ()) 28 May 1981 (1981-05-28)	
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

10 July 2000

Date of mailing of the international search report

18/07/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Vanhulle, R

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/EP 00/02210

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5726617 A	10-03-1998	NONE	
US 5333455 A	02-08-1994	JP 5087189 A DE 4232225 A	06-04-1993 01-04-1993
JP 55049273 A	09-04-1980	JP 1288932 C JP 60010912 B	14-11-1985 20-03-1985
WO 8101479 A	28-05-1981	AU 6481380 A EP 0041954 A	03-06-1981 23-12-1981
WO 9855060 A	10-12-1998	AU 8060498 A	21-12-1998
GB 897859 A		NONE	




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b> <b>H01F 27/33</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/58978</b> <b>(43) International Publication Date:</b> 5 October 2000 (05.10.00)
<b>(21) International Application Number:</b> PCT/EP00/02210 <b>(22) International Filing Date:</b> 9 March 2000 (09.03.00) <b>(30) Priority Data:</b> 99200953.0 29 March 1999 (29.03.99) EP <b>(71) Applicant (for all designated States except US):</b> ABB T & D TECHNOLOGIES LTD. [CH/CH]; P.O. Box 8131, CH-8059 Zurich (CH). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> CALABRO', Stefano [IT/IT]; Largo Zecca, 10/9, I-16124 Genova (IT). MORI-CONI, Franco [IT/IT]; Via Aldo Moro, 1/B, I-20097 San Donato Milanese (IT). <b>(74) Agent:</b> GIAVARINI, Francesco; ABB Ricerca S.p.A., Viale Edison, 50, I-20099 Sesto San Giovanni (IT).		<b>(81) Designated States:</b> BR, CA, CN, IN, JP, KR, RU, UA, US, ZA. <b>Published</b> <i>With international search report.</i>

**(54) Title:** LOW NOISE TRANSFORMER**(57) Abstract**

An electrical transformer comprising a tank containing transformer fluid, a transformer core and winding subassembly disposed in said transformer fluid within and spaced apart from said tank, active means, disposed in said transformer fluid within said tank, for varying the volume of said transformer fluid in order to reduce pressure waves generated by the vibration of said core and winding subassembly during electromagnetic operation. The active means comprise at least a cell having a main body and a corrugated membrane connected to said main body in order to realize a sealed container able to maintain a low pressure atmosphere inside and actuating means placed inside said sealed container and solidly connected to said corrugated membrane.

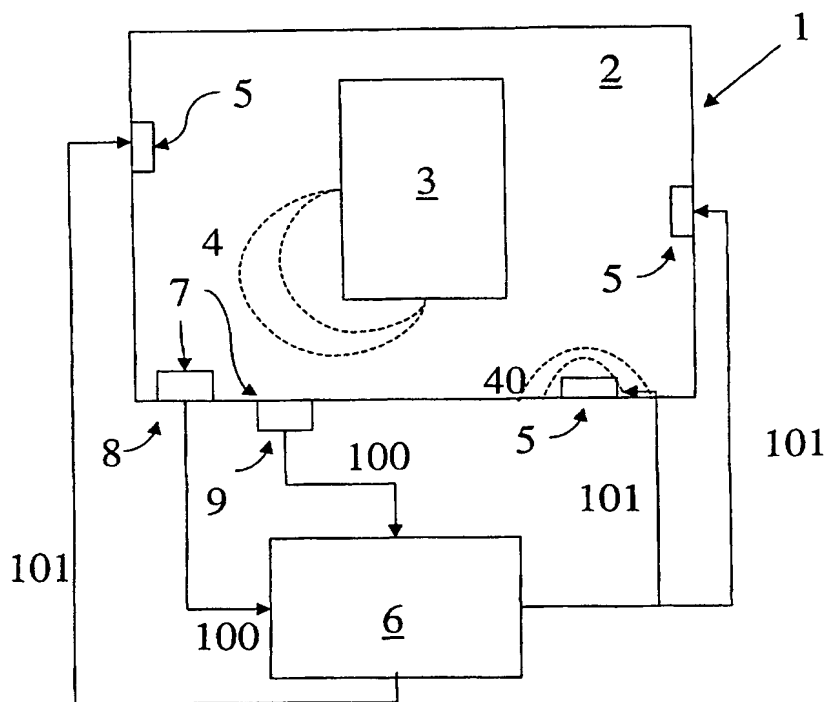

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon		Republic of Korea	PT	Portugal		
CN	China	KR	Republic of Korea	RO	Romania		
CU	Cuba	KZ	Kazakstan	RU	Russian Federation		
CZ	Czech Republic	LC	Saint Lucia	SD	Sudan		
DE	Germany	LI	Liechtenstein	SE	Sweden		
DK	Denmark	LK	Sri Lanka	SG	Singapore		
EE	Estonia	LR	Liberia				

*spec  
ifficial  
5-3-02*

LOW NOISE TRANSFORMER  
DESCRIPTION

The present invention generally relates to electrical transformers and more particularly to electrical transformers equipped with means having particular structure and geometry for obtaining low noise levels.

It is well known that electrical transformers generally comprise a tank containing a transformer fluid (i.e. mineral oil), a transformer core and a winding subassembly. The transformer core and winding subassembly are generally placed in the transformer fluid and are spaced apart from the tank of the transformer.

It is also well known that noise from transformers is a problem for utility industries or companies, especially when the transformer is installed in urban areas.

The people skilled in the art know that noise in transformers is generated by vibration of the core and winding subassembly during electromagnetic operation and by cooling ventilators used for extracting heat, generated during electromagnetic operation, from the tank to the surrounding atmosphere. While noise from cooling ventilators can be effectively reduced by designing lower speed and larger diameter ventilators equipped with low noise blades, the reduction of the noise from the core and winding subassembly vibration is still a problem, given the fact that solutions known in the state of the art are affected by several drawbacks.

Most of the conventional approaches of the state of the art are oriented to consider passive solutions, for reducing the core noise.

A known approach is to add mass to the transformer core in order to avoid core vibration. Unfortunately, this approach leads to transformers having quite larger core sectional area, with significant increase of weight and costs.

Other approaches consider the use of passive devices inside the transformer tank. These devices are constituted by stacks of layers that are made of materials

having elastic properties (i.e rubber). Being placed inside the transformer tank, they act as damping elements adsorbing transformer fluid pressure waves generated by the core and winding subassembly vibration. The main drawback of this approach is due to the fact that these devices can be designed only for  
5 adsorbing fluid pressure waves having a certain amplitude and frequency. If a variation of the frequency and the amplitude of such pressure waves occurs, for example due to changed operational conditions of the transformer, the damping action of these devices may not be effective.

The use of active devices for noise reduction is disclosed, for example, in the US  
10 patent N° 5,726,617.

In the mentioned patent, the use of dynamic-pressure varying devices, placed inside the transformer tank, is considered. Said means, constituted for example by hydraulic actuators or pumps or other similar devices, vary dynamically the pressure of the transformer fluid in order to reduce the pressure waves generated  
15 by the operating core and winding subassembly. An active damping device, placed between the transformer tank and the transformer core and winding subassembly is also disclosed. Its function is to damp actively the vibrations of the core and winding subassembly. Vibration sensors and a controller of the mentioned active devices are placed inside or outside the tank.

20 The solution described in the mentioned patent, appears, however, of difficult implementation, given the fact that no particular attention is provided to the structure of the mentioned active devices. Actually, a significant amount of energy is required for actuating hydraulic actuators or pumps or similar devices. Moreover due to the not negligible size of such devices, only a small number of  
25 them can be placed inside the tank. This fact implies a noise cancellation, which is certainly not optimal, being dependent on the particular position of the dynamic-pressure varying devices. In addition, complicated assembling operations are evidently required for mounting said hydraulic actuators and/or similar devices. Complicated assembling operations are also required for

mounting said damping devices placed between the core and the tank of the transformer. This fact further increases the manufacturing costs.

It is an object of the present invention to provide an electrical transformer able to overcome the above mentioned problems, in particular without having any  
5 significant increase of costs for manufacturing or assembling devices able to cancel the noise from core and winding subassembly.

A further object of the present invention is to provide an electrical transformer which uses, for reducing the noise generated by the core and winding subassembly, a plurality of active devices that are able to vary the transformer  
10 fluid volume inside the transformer tank and are very simple to be placed inside the inner surface of the tank.

An other object of the present invention is to provide an electrical transformer comprising a plurality of active devices, which can be easily controlled depending on the operating conditions of the transformer.

15 In order to achieve these objects and others that will become apparent hereinafter, it is provided an electrical transformer, according to the present invention, which comprises:

- a tank containing transformer fluid;
- a transformer core and winding subassembly disposed in said transformer  
20 fluid within and spaced apart from said tank;
- active means for varying the volume of said transformer fluid in order to reduce pressure waves generated by the vibration of said core and winding subassembly during electromagnetic operation, said active means being disposed in said transformer fluid within said tank.

25 The transformer, according to the present invention, is characterised in that said active means comprise at least a cell having:

- a main body and a corrugated membrane operatively connected to said main body in order to realise a sealed container able to maintain a low pressure atmosphere inside;



- actuating means placed inside said sealed container and solidly connected to said corrugated membrane.

The present invention will now be described in more detail with reference to a number of embodiments in accordance to the invention which are given by way of example and which are shown in the accompanying drawings in which:

figure 1 is a schematic view of an embodiment of an electrical transformer according to the present invention;

figure 2 is a sectional view of an embodiment of an active cell comprised in an electrical transformer according to the present invention;

figure 3 is an upper view of an embodiment of an active cell comprised in an electrical transformer according to the present invention.

Referring to figure 1, a schematic view of an embodiment of an electrical transformer according to the present invention is represented.

The transformer according to the present invention comprises a tank 1 containing transformer fluid 2, such as mineral oil. A transformer core and winding subassembly, schematically represented by the reference number 3, are disposed in said transformer fluid, within and spaced apart from said tank;

As schematically represented in figure 1, pressure waves 4 are generated by the vibration of the core and winding subassembly 2 during electromagnetic operation of the transformer. Active means comprising at least a cell 5 are provided for regulating the volume of the transformer fluid 2 in order to reduce pressure waves 4.

Referring to figures 2 and 3, two different schematic views of a possible structure of a cell 5 are presented.

A cell 5 is structured as a main body 20 having a corrugated membrane 21 operatively connected so as to realise a sealed container. The shape and the number of corrugations for the membrane 21 can be easily designed, according to the needs, by the skilled artisan. Preferably, the main body 20 and the membrane 21 are made of stainless steel and can be welded at the edges.

In an alternative embodiment, every cell 5 can be provided with elastic means 23, preferably a soft spring, operatively connected between the main body 20 and the corrugated membrane 21, preferably on the central area 22 of the cell 5. Elastic means 23 have the function of keeping the central area 22 parallel to the plane of the main body 20.

Actuating means 24 are provided inside the cell 5. They are solidly connected to the corrugated membrane 21 and preferably placed close to the central area 22. In a preferred embodiment, illustrated in figures 2 and 3, actuating means 24 are realised with a plurality of piezoelectric stack elements 25. Advantageously, a cell 5 is also equipped with a valve 26, necessary for forcing internally a low pressure atmosphere 28 (an indicative value can be 0.1 bar) and with an electrical connection 27, necessary for providing driving signals to the actuating means 24.

Low pressure atmosphere causes the partial quenching of the corrugated membrane 21 onto the main body 20. The complete quench of the membrane 21 is prevented by the presence of the actuating means 24. Advantageously a plurality of cells 5 can be placed inside the tank 1 and connected to controlling means 6 placed outside the tank 1. The layout of the active cells inside the tank can be easily chosen and optimised by the skilled artisan in order to obtain the most effective cancellation of the pressure waves 4. Detection means 7 for detecting pressure waves 4 are also provided. They comprise (figure 1) one or more transducers that can be, for example, pressure transducers 8 placed inside the tank or, alternatively, vibration transducers 9, placed outside the tank 1, for detecting the vibrations of the tank 1 generated by the pressure waves 4. The detection means 7 are connected to the controlling means 6. The connection can preferably be of the electrical type, but the meaning of the term "connection" should be intended extensively. So other kinds of connections, such as wireless connections (such as for example through radio communication) or cabled connections (such as for example through optical cables) can be provided.

In a preferred embodiment, controlling means 6 comprise a feedback controller, such as a programmed digital computer.

Referring now to all the mentioned figures, the operation of reducing transformer noise is described.

- 5 Pressure waves 4 are detected by detection means 7 which transmit input signals 100, indicative of the amplitude and frequency of such pressure waves 4, to the controlling means 6.

Using appropriate software programs, the controlling means 6 analyse the input signals 100 and, correspondingly transmit output signals 101 for driving the  
10 actuating means 24 comprised in each cell 5.

Also the connection between the controlling means 6 and the actuating means 24 should be intended in an extensive way, as described above.

Actuating means 24 actuate the corrugate membrane 21 forcing its vibration which generates pressure waves, indicated by reference number 40 in figure 1,  
15 able to change the volume of the transformer fluid. Such fluid volume changes, proportional to the amplitude and frequency of pressure waves 4, are very effective in core and winding subassembly noise reducing.

If operating conditions of the transformer change, also the vibration mode of the membrane 21 changes accordingly, thanks to the action of the controlling means  
20 6 which always operate for minimising the magnitude of the pressure waves 4.

As mentioned, a plurality of cells can be placed inside the transformer tank 1, considering the most appropriate layout. In a preferred embodiment of the present invention, different groups of cells, corresponding to different locations of the tank, can be driven independently. In practice, each group of cells can be  
25 driven in closed relation to the amplitude and frequency of the pressure waves that are affecting the tank area where the group is located, at a certain instant. This functioning mode improves very effectively the transformer noise cancellation.

The present invention has proven to be of relatively easy and low cost realisation. Actually, every cell 5 is characterised by a structure very simple to manufacture and having very low size. Due to the use of piezoelectric elements, as actuating means 24, every cell has proven to be of easy control either  
5 singularly or in parallel with other cells. This fact implies that a relatively large number of cells can be used. The use of a large amount of cells is also favoured by the relatively low voltage signals that can be used for driving the actuating means 24 of each cells 5.

The foregoing description of preferred embodiments of the present invention has  
10 been presented for purposes of illustration. It is not intended to be exhaustive or to limit the invention to the precise form disclosed and obviously many modifications and variations are possible in light of the above teaching.


In practice many variations may suggest themselves to those skilled in the art within the scope of the invention disclosed herein.

CLAIMS

1. An electrical transformer comprising:
  - a tank containing transformer fluid;
  - 5 -a transformer core and winding subassembly disposed in said transformer fluid within and spaced apart from said tank;
  - active means for varying the volume of said transformer fluid in order to reduce pressure waves generated by the vibration of said core and winding subassembly during electromagnetic operation, said active means being
  - 10 disposed in said transformer fluid within said tank;
  - characterised in that said active means comprise at least a cell having:
    - a main body and a corrugated membrane operatively connected to said main body in order to realise a sealed container able to maintain a low pressure atmosphere inside;
    - 15 -actuating means placed inside said sealed container and solidly connected to said corrugated membrane.
2. An electrical transformer as in claim 1 characterised in that it comprises elastic means placed inside said cell, operatively connecting said corrugated membrane and said main body.
- 20 3. An electrical transformer as in claim 1 or 2 characterised in that said actuating means comprise one or more piezoelectric stack elements.
4. An electrical transformer as in one or more of the previous claims characterised in that said actuating means are connected to controlling means placed outside said tank.
- 25 5. An electrical transformer as in claim 4 characterised in that said controlling means are connected to detection means for detecting pressure waves generated by the vibration of said core and winding subassembly during electromagnetic operation and transmitting a signal indicative of the amplitude and frequency of said pressure waves to said controlling means.

6. An electrical transformer as in claim 5 characterised in that said detection means are placed inside the tank of said transformer.
7. An electrical transformer as in claim 5 characterised in that said detection means are placed outside the tank of said transformer.
- 5 8. An electrical transformer as in claims 7 characterised in that said detection means comprise one or more transducers for detecting the vibrations of said tank generated by said pressure waves.
9. An electrical transformer as in claim 6 characterised in that said detection means comprise one or more pressure transducers.
- 10 10. Method for reducing pressure waves generated by the vibration of said core and winding subassembly during electromagnetic operation of an electrical transformer as in one or more of the previous claims, characterised in that it comprises the following steps:
  - detecting pressure waves generated by the vibration of said core and winding subassembly of said electrical transformer during electromagnetic operation;
  - 15 -transmitting signals, indicative of amplitude and frequency of said pressure waves, to said controlling means;
  - analysing the signal transmitted by said detection means and transmitting signals for driving said actuating means comprised in each said cells;
  - 20 -generating, through the vibration of the corrugated membrane of each of said cells, transformer fluid pressure waves, varying in amplitude and frequency, able to regulate the volume of said transformer fluid.
11. An active device, for regulating the volume of a fluid in which said device is disposed, through the generation of fluid pressure waves varying in amplitude and frequency, characterised in that it comprises:
  - 25 -a main body and a corrugated membrane operatively connected to said main body in order to realise a sealed container able to maintain a low pressure atmosphere inside;

-actuating means placed inside said sealed container and solidly connected to said corrugated membrane.

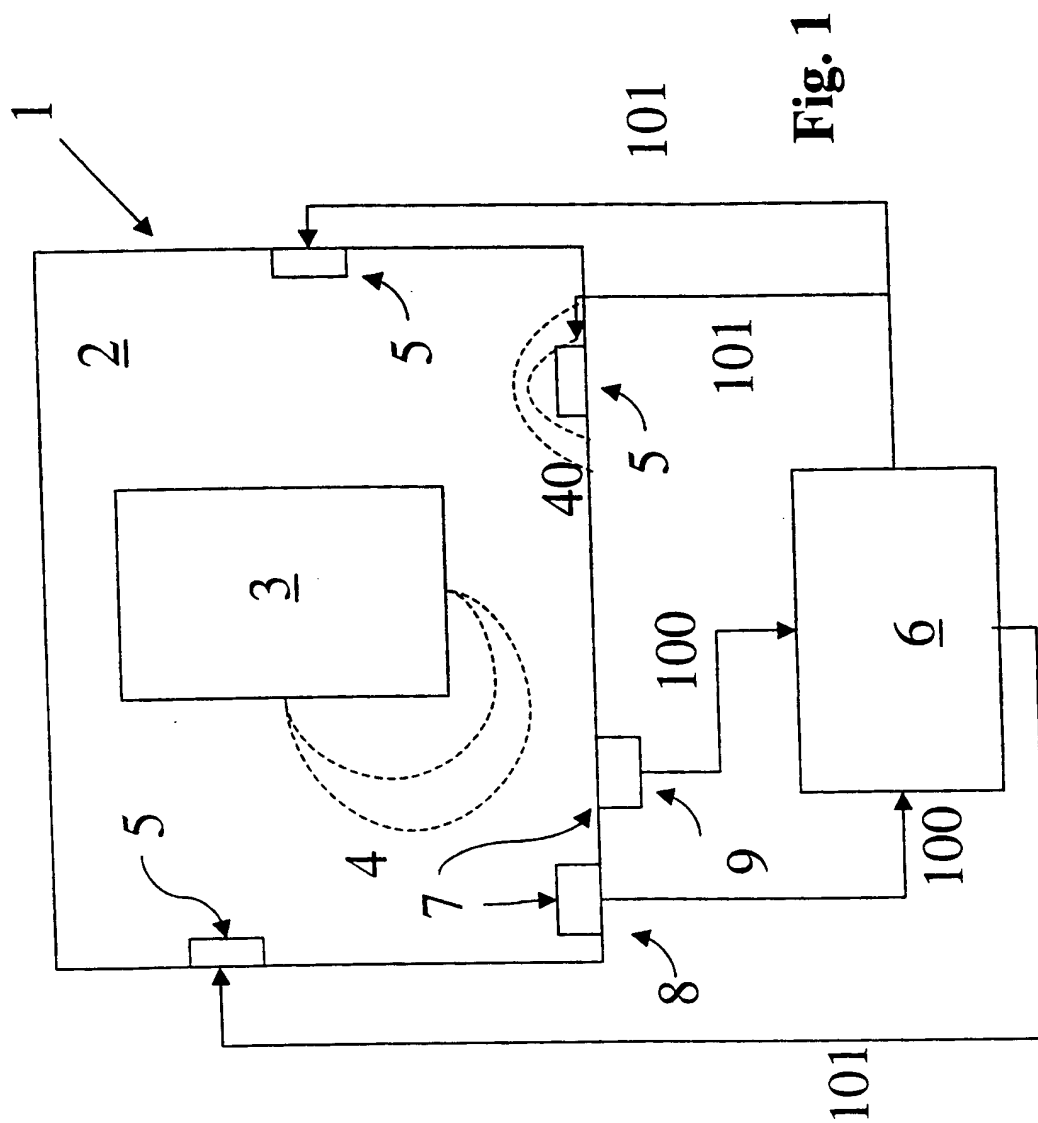



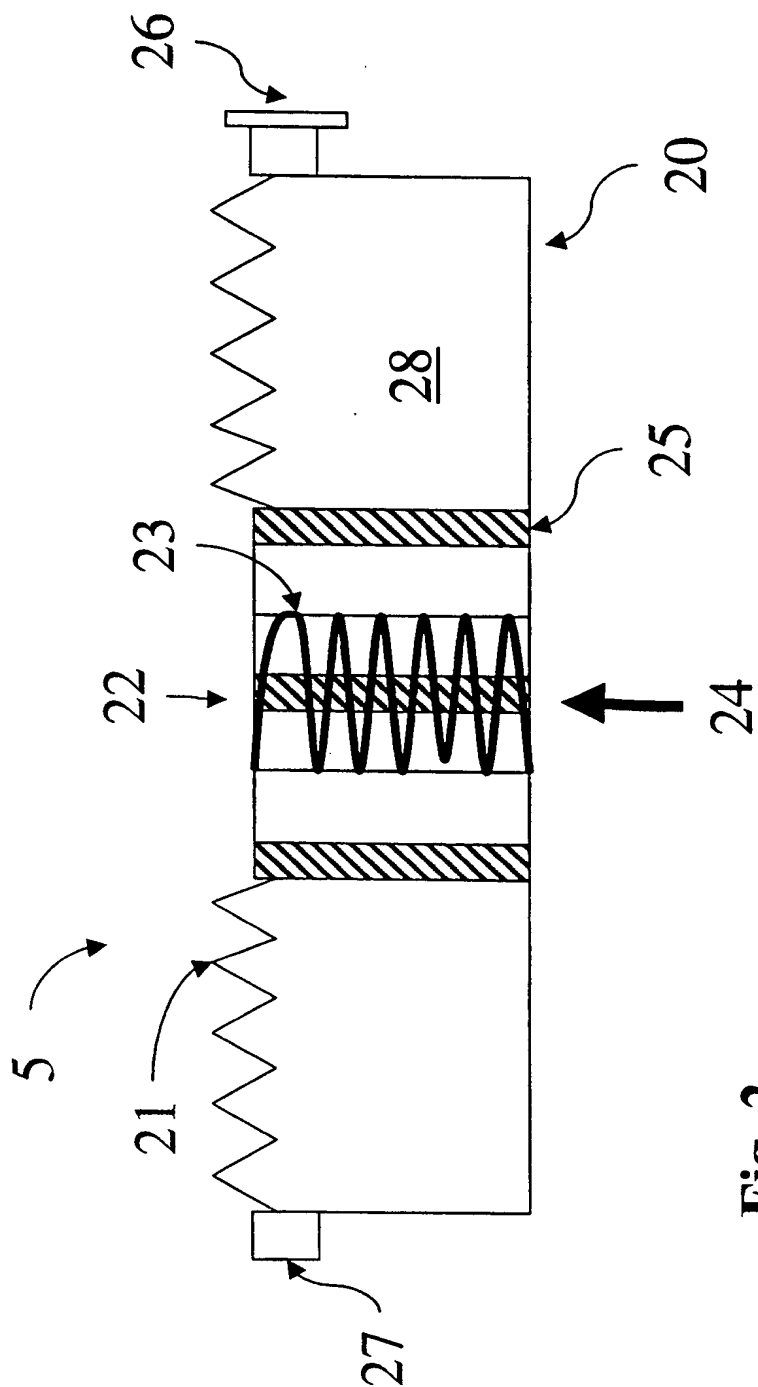


Fig. 2

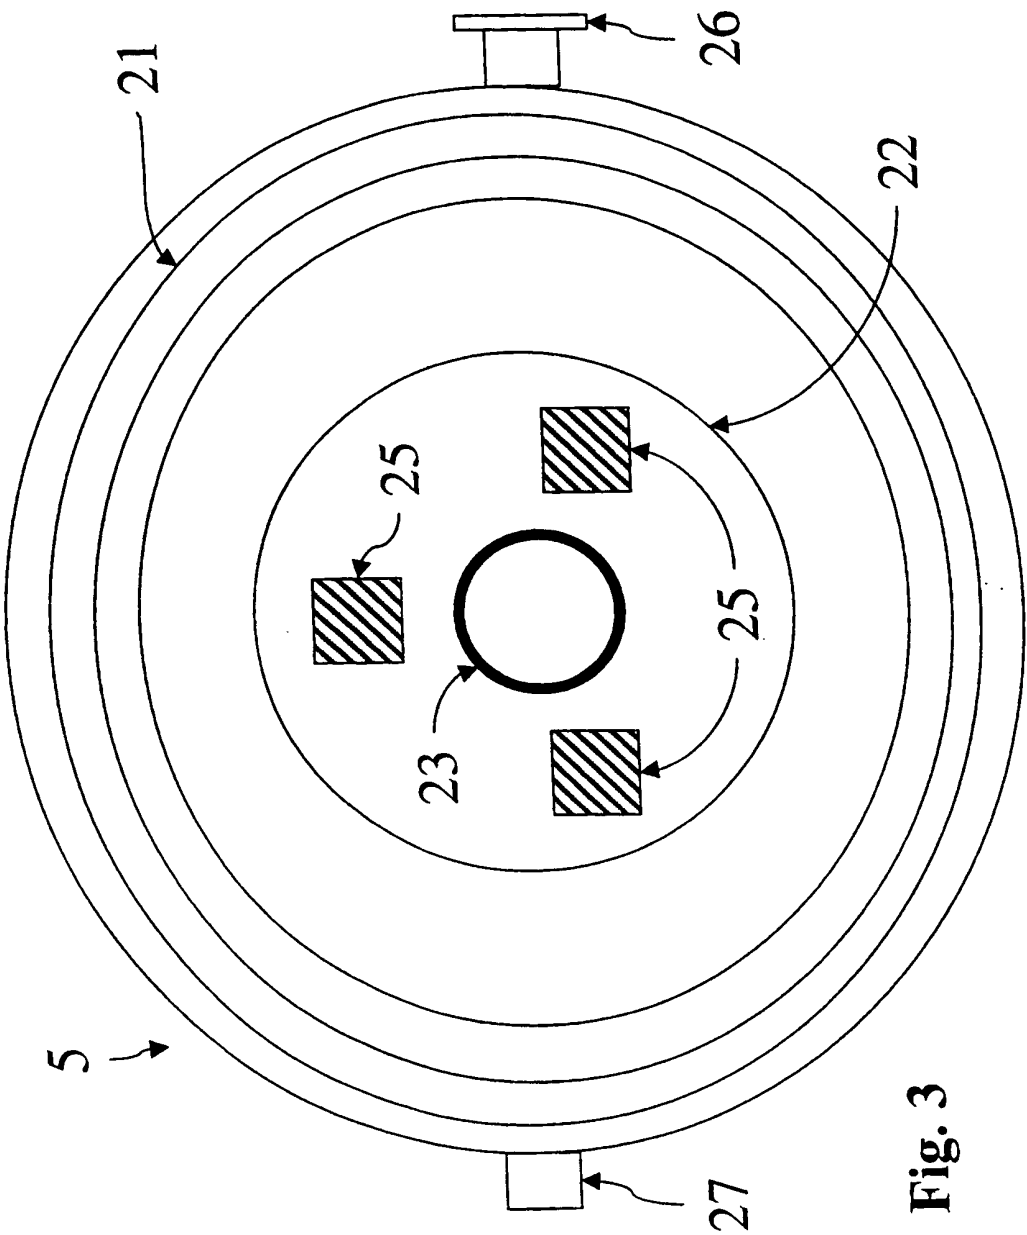


Fig. 3

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/02210

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H01F27/33

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 726 617 A (SMITH STEPHEN LINWOOD ET AL) 10 March 1998 (1998-03-10) claims 1-10 ---	1, 10, 11
Y	US 5 333 455 A (YOSHIOKA SHIGEKI) 2 August 1994 (1994-08-02) column 3, line 25 -column 5, line 20 ---	1, 10, 11
A	PATENT ABSTRACTS OF JAPAN vol. 004, no. 092 (M-018), 3 July 1980 (1980-07-03) & JP 55 049273 A (CANON INC), 9 April 1980 (1980-04-09) abstract ---	
A	WO 81 01479 A (SOUND ATTENUATORS LTD ;CHAPLIN G (GB); BEARCROFT R (GB); SMITH R ( ) 28 May 1981 (1981-05-28) ---	
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

10 July 2000

Date of mailing of the international search report

18/07/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Vanhulle, R

# INTERNATIONAL SEARCH REPORT

Inter. Patent Application No.

PCT/EP 00/02210

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 55060 A (ECHLIN INC ;KUMAR DEVENDRA (US); KUMAR SATYENDRA (US); DOUGHERTY M) 10 December 1998 (1998-12-10) ---	
A	GB 897 859 A (ASSOCIATED ELECTRICAL INDUSTRIES LTD.) -----	

# INTERNATIONAL SEARCH REPORT


information on patent family members

International Application No

PCT/EP 00/02210

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5726617 A	10-03-1998	NONE	
US 5333455 A	02-08-1994	JP 5087189 A DE 4232225 A	06-04-1993 01-04-1993
JP 55049273 A	09-04-1980	JP 1288932 C JP 60010912 B	14-11-1985 20-03-1985
WO 8101479 A	28-05-1981	AU 6481380 A EP 0041954 A	03-06-1981 23-12-1981
WO 9855060 A	10-12-1998	AU 8060498 A	21-12-1998
GB 897859 A		NONE	

US 0985449704P1



Creation date: 29-01-2003  
Indexing Officer: EGNUYE - ELIZABETH NGUYEN  
Team: CENTRALSCANPRINT  
Dossier: 09854497

Legal Date: 30-08-2002

No.	Dccode	Number of pages
1	CTNF	7
2	892	1

Total number of pages: 8

Remarks:

Order of re-scan issued on .....